



Product Overview

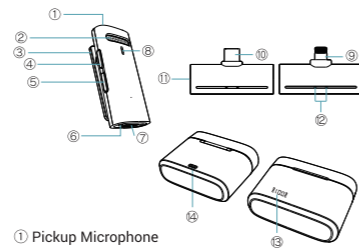


- ① Pickup Microphone
- ② Windproof net /MIC
- ③ Microphone clip
- ④ Power button of microphone
- ⑤ Function button
- ⑥ Charging pin
- ⑦ Type-C charging port of microphone
- ⑧ Indicator light of microphone
- ⑨ Lightning port to connect phone
- ⑩ Type-C port to connect phone
- ⑪ Receiver charging port
- ⑫ Indicator light of receiver
- ⑬ Battery indicator light of case
- ⑭ Type-C charging port of case

How To Use


Step 1: Connect the receiver to your phone using the provided cord. The indicator light will flash




Step 2: Press the power button on the microphone. The indicator light will flash blue and red alternately, indicating that the microphone is turned



Step 3: Once the receiver and transmitter are successfully connected, the receiver's blue indicator light and the transmitter's blue and red lights will become steady. You may then open your phone's camera, live streaming app, or other applications and begin using the microphone for audio capture.




Important Note: The receiver does not contain a battery and does not require charging during use. If your phone's battery is low while live streaming, you can charge it directly through the port on the receiver.



Charging Instructions


1. Charging the case: Connect the charging case to a powered computer or compatible adapter (adapter not included) using the provided Type-C cable. During charging, the display will show flashing single-digit




numbers.
2. Charging the Microphone Transmitter via the Case Place the microphone transmitter into the charging case and close



the lid. The corresponding battery icon on the case display will flash while charging.
3. Direct Charging of the Microphone Transmitter To charge the microphone transmitter directly, connect it to a powered computer or compatible adapter using the provided Type-C cable. A steady



Packing List



Package Contents

- Microphone Transmitter x2
- Receiver x2
- Charging Case x1
- Charging Cable x1
- User Manual x1

Note: This product is a smart wireless microphone that provides professional-grade recording output. Plug and play, no app required.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.
- The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

After-sale service
WinBridge provide one year warranty and lifetime technical support.
Toll Free Hotline: +1 (833) 996-2881
info@winbridge.com
http://www.winbridgestore.com

Please be confident that seller support is just a mail away from you in case you find any difficulty, kindly do not hesitate to write back to us if you need any clarification or any kind of support.

FCC Warning

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference
(2) this device must accept any interference received, including interference that may cause undesired operation.

Note

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.
However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
• Reorient or relocate the receiving antenna.
• Increase the separation between the equipment and receiver.

Specification

Frequency	2.4 GHz Digital Frequency
Frequency Response	20 Hz - 20 KHz
Sampling Frequency	48 KHz
Transmission Range	up to 100m (w/o any obstacle)
Signal To Noise Ratio	≥75dB
Sensitivity	-38dB±3dB
Battery Capacity	140mAh (Transmitter) 500mAh (Charging case)
Working Duration	Up to 11h
Interface	USB-C
Weight	95g
Dimension	83*32*61 mm

Receiver

Function		LED
Power on (Not paired with the microphone transmitter)	Automatically power on after plugging in the mobile phone port	Blue light keep flashing
Power off	Automatically shut down after unplugging	Lights Off
Paired with the microphone transmitter		Solid Blue

Android Note: For some Android phones, the OTG function might need to be enabled manually in settings to allow the receiver to work.

About UI

Microphone Transmitter		
Function	Button	LED
Power on (Unconnected)	Long Press ④	Flashes blue and red alternately
Power off	Long Press ④	Lights turn off
Connected		Solid Blue and Red
Noise reduction on	Automatically on	Solid Blue and Red
Noise reduction off	Press once ⑤	Solid Blue
Silent mode on	Press twice ⑤	Blue lights flashing
Silent mode off	Press twice ⑤	Solid Blue and Red