

Natural voice

Voice Amplifier User manual




S278 UHF

Please read the instruction carefully before using it.

Features:

- 1) WINBRIDGE original sound amplification system, maximum output power 15W;
- 2) Adopt advanced UHF wireless transmission technology;
- 3) Support Tws, Bluetooth, TF card, USB disk, AUX to play audio.


Function Illustration

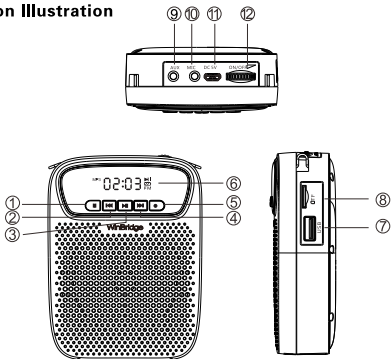


① Mode Key

Short press " M " button to switch modes among: Battery mode, Bluetooth mode,UHF mode,TF Card and USB mode.


② Previous

Long press  for fast reverse, short press to go to previous song;

③ Play/Pause

Short press  to pause and press again to play.

④ Next

long press  for fast forward, short press to go to next song;

⑤ Recording

⑥ Digital display–screen

⑦ USB slot (reading and storing data)

⑧ TF card slot(reading and storing data)

⑨ AUX slot (support ø3.5mm jack)


⑩ MIC slot (support ø3.5mm wired MIC)

⑪ DC 5V charging slot

⑫ Power switch / volume control

Scroll the wheel key to "ON" to turn on the amplifier, and the LCD screen will light with a sound of " crack " . And scroll to" ON " continuously to increase volume; Scroll to "OFF" continuously to decrease volume till turn off.

Headset Mic Function Illustration

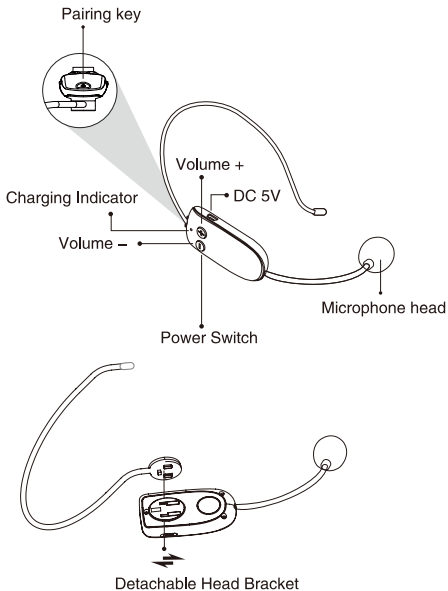

1. Switch ON /OFF

Turn on the UHF wireless microphone with the blue battery indicator is on.

Turn off the UHF wireless microphone with the blue battery indicator goes out.

The wireless microphone factory setting have been paired successfully, you can use it directly. If the microphone has no sound or the microphone is disconnected, you need to pair it manually.

2. How to Pair Wireless Microphone with Speaker

Step1:


Turn on wireless headset microphone with blue indicator lights.

Step2:


Turn on speaker, short press **M** button to switch to UHF mode, then long press **M** button again for about 3 seconds to enter

UHF pairing mode with voice prompt: "**UHF is waiting for connection**".

Step3:

Do a press on the small silicone wifi button"  " on the mic until speaker prompt:" **UHF is connected**" , then your voice will be amplified.

Noted:

- 1) The voice amplifier and microphone will disconnect when long press "  " key on the Headset microphone or long press M button on the speaker. Please refer above steps to re-pair manually.
- 2) In UHF mode, short press " + " or " - " button on the microphone will turn up/down volume.

Charging instructions of wireless microphone:

When the blue light on the microphone flashes, it means that the battery is low and you need to charge the microphone.



HOW TO CHARGE MICROPHONE?


In charging status: the indicator shows red while charging.

Fully charged: the red indicator goes off after charged fully.



Operation Description

1. TF card/ USB flash disk





Insert TF card/ USB to the corresponding port, amplifier will automatically play audio ; press  ,  to choose audio.



2. Recording

A. Connect with wireless mic or plug 3.5mm wired MIC into "MIC" port, to record by short press  with voice prompt "start recording", then short press  again with voice prompt "play recording".


(Noted : Please make sure TF card/USB is inserted.)

-
- B. In recording mode: the recorded files will be saved automatically in TF card or USB flash disk.
- C. Short press  or  to play the last or next recorded files.
- D. During recording files playing, short press to  pause, then long press  to delete recording files. And the screen will show " dELL ".

Noted:



1. TF card or USB driver is NOT included
2. Please use standard MIC to record properly
3. If you want to delete the recorded file, please note that you should unplug the wired microphone first

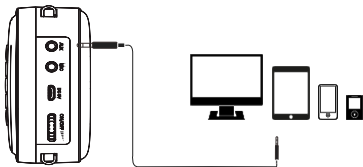3. AUX Input



Connecting amplifier to external audio device (computer/ cellphone/MP3/MP4) via AUX cable, amplifier will play music in above devices when LCD screen show "LINE" with prompt voice "Audio In mode"

4. How to connect with Bluetooth




Click  to switch to Bluetooth mode with a screen shows  , and there will be voice prompts:

Bluetooth is waiting for connection

Turn on Bluetooth device and search name " **S278 UHF** " to pair.

5. TWS Function (two speakers required)


Step1:

Turn on two S278UHF voice amplifiers, click the  button to enter Bluetooth mode. Then long press  key in one of the voice amplifier to enter waiting mode, the bluetooth indicator  in the other one stops flashing which means these two voice amplifiers are connected successfully.

Step2:

Turn on your phone or Bluetooth device and search name " **S278 UHF** " to pair.

Step3:

Long press  key to quit TWS connecting.

6. How to charge speaker

1. Use the included DC 5V power adapter to charge the speaker internal rechargeable battery.
 2. Plug adapter into 110~220 AC outlet. Connect the cable end into the DC 5v power input on speaker.
 3. It will normally take 3–5 hours to fully charge the battery.
 4. When charging is required, there is a voice prompt "Low battery, please charge " , the battery indicator will blink while charging. It will stop blinking when battery is fully charged.
 5. Recharge the battery within 48 hours of " low battery " voice prompt. In order to extend the life of the internal battery, please charge it regularly even if system is not being used.
 6. It is suggested that you charge the internal battery an additional 1–2 hours after fully charged to extend its life.
 7. Please DO NOT over charge the battery by leaving the system plugged in continuously. This will reduce the life of the internal rechargeable battery and could cause over heating.
-

Specifications

Output power	$\leq 15W$	Frequency response	200Hz~18KHz
Speaker Impedance	4 Ω	Working temperature	-10°C~45°C
Charging Voltage	DC, 5V--1A	Charging time	3H~4H
Music mode time	4H~6H (medium volume)	Amplify time	6H~8H

(Remarks: The headset can be used for 3 to 4 hours after fully charged)

Package includes:

- 1* main machine
 - 1* waistband
 - 1* wired microphone
 - 1 * USB cable
 - 1* user manual
-

After-sale service

We will provide one year warranty and lifetime technical support. Please be confident that seller support is just a mail away from you in case you find any difficulty. Kindly do not hesitate to write back to us if you need any clarification or any kind of support.

Email: info@wwinbridge.com

Official site :www.wwinbridge.com
